


# Installation Drawing

Firestopping to joint between floor slab and profiled cladding

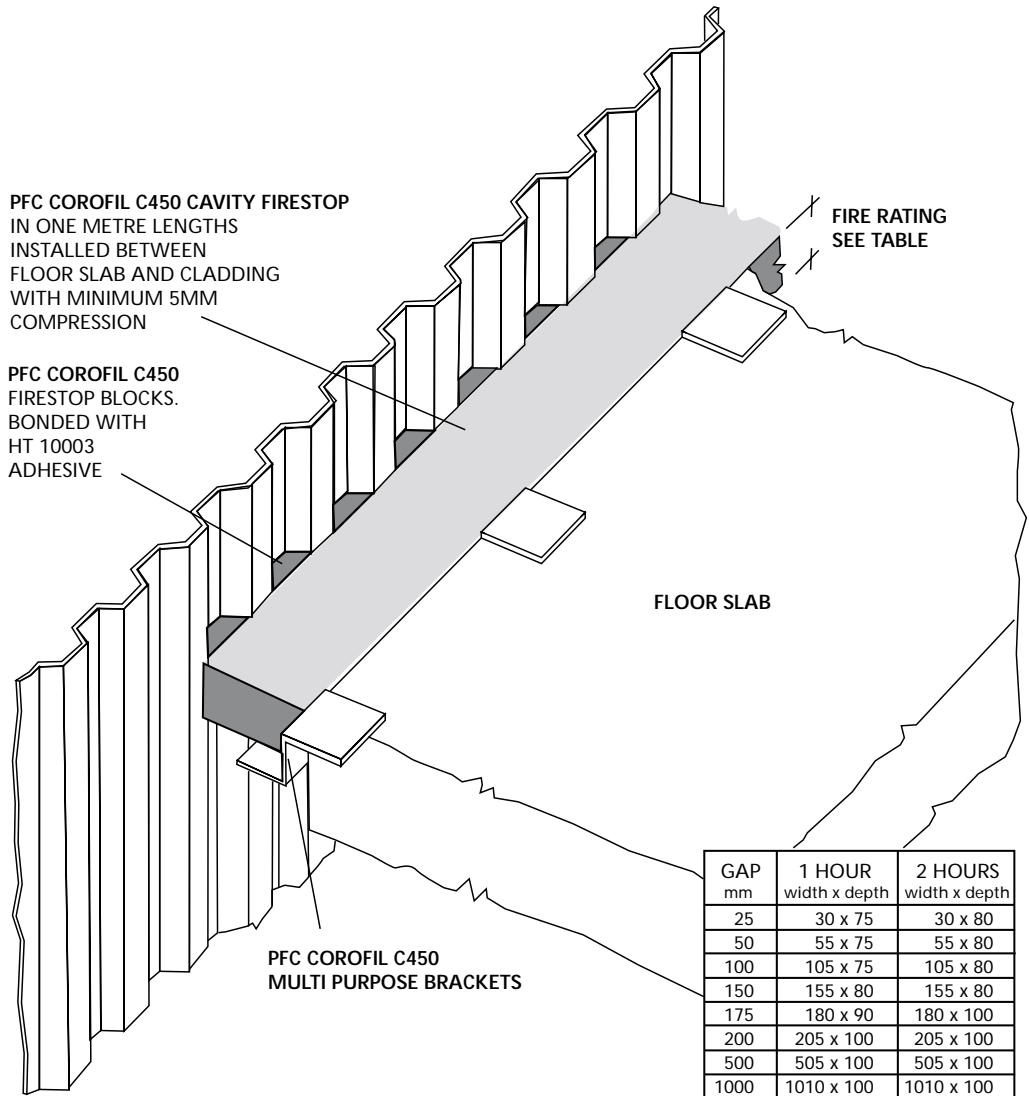

1. GAPS UP TO 100mm - BOND TO FLOOR SLAB WITH HT1003 ADHESIVE.
2. GAPS OVER 100mm UP TO 1000mm - SUPPORTS OFF FLOOR SLAB AT 500mm CENTRES.
3. TO FIRESTOP GAPS OVER 1000mm - CONSULT OUR TECHNICAL DEPARTMENT.
4. FOR FIRE RATINGS IN EXCESS OF 2HOURS CONSULT OUR TECHNICAL DEPARTMENT.